

**Overview**

- through beam sensor
- 158 mm
- pulsed red LED
- Push-Pull
- potentiometer / IO-Link
- connector M8, 3 pin
- -25 ... 60 °C
- IP 67



Picture similar



**Technical data**

**General data**

Type	Through beam sensor
Object size	> 1 mm
Repeat accuracy	< 0,06 mm
Hysteresis	< 0,25 mm
Sensitivity adjustment	Potentiometer, 270° IO-Link
Light source	Pulsed red LED
Wave length	660 nm
Light indicator	LED yellow

**Communication interface**

IO-Link	Yes
Interface	IO-Link V1.1

**Electrical data**

Response time / release time	< 0.1 ms 0
Switching frequency	< 5000 Hz, default < 1500 Hz < 250 Hz < 8000 Hz
Voltage supply range +Vs	10 ... 30 VDC

**Electrical data**

Current consumption max. (no load)	40 mA
Output function	Light / dark operate switchable
Output circuit	Push-pull / IO-Link
Voltage drop Vd	< 2,8 VDC
Output current	< 200 mA
Short circuit protection	Yes
Reverse polarity protection	Yes


**Mechanical data**

Width / diameter	150 mm
Fork width Sb	158.4 mm
Height / length	150 mm
Penetration depth	120 mm
Depth	12 mm
Type	L profile
Housing material	Die-cast zinc
Connection types	Connector M8, 3 pin


**Ambient conditions**

Operating temperature	-25 ... +60 °C
Protection class	IP 67

**Dimension drawing**

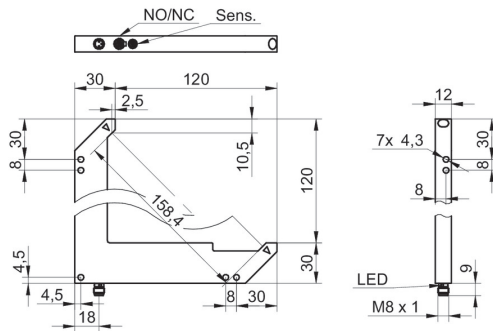

**Connection diagram**

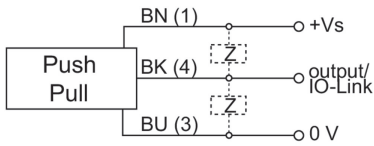

**Pin assignment**

